SOLIDEAL PON 775 NMAS **BY CAMSO**







ENGINEERED TO PREVENT STATIC SHOCKS IN HIGH **INTENSITY APPLICATIONS**

Engineered to prevent static shocks and provide the best performance of heat resistance, energy efficiency and long-lasting life in high intensity applications.

PERFORMANCE

INTENSITY

ENERGY SAVINGS

TIRE LIFE







SOLIDEAL PON 775 NMAS



TIRE SIZES (1)				
10 X 4 X 6 1/2	16 X 5 X 10 1/2	16 1/4 X 7 X 11 1/4	21 X 8 X 15	28 X 12 X 22
10 X 5 X 6 1/2	16 X 6 X 10 1/2	18 X 6 X 12 1/8	21 X 9 X 15	33 X 14 X 22
12 X 4 1/2 X 8	16 X 7 X 10 1/2	18 X 7 X 12 1/8	22 X 8 X 16	33 x 16 x 22
13 1/2 X 5 1/2 X 8	15 X 5 X 11 1/4	18 X 8 X 12 1/8	22 X 9 X 16	
14 X 4 1/2 X 8	16 1/4 X 5 X 11 1/4	18 X 9 X 12 1/8	22 X 10 X 16	
14 X 5 X 10	16 1/4 X 6 X 11 1/4	21 X 7 X 15	22 X 12 X 16	



PATENTED ANTI-STATIC TECHNOLOGY


 Prevents static electricity build-up to eliminate the risk of safety issues and truck damage

THERMALLY EFFICIENT CONSTRUCTION

 Provides a cooler running tire and the best in class energy efficiency

ABRASION-RESISTANT TREAD COMPOUND

Increases tire life

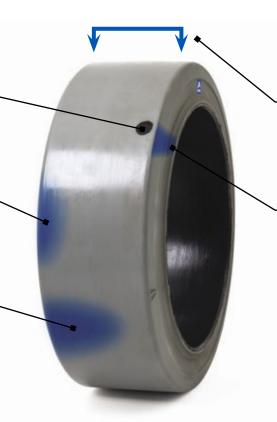

WIDEST POSSIBLE FLAT FOOTPRINT

 Reduces ground pressure to minimize heat built-up

UNIQUELY ENGINEERED SIDEWALL

 Reduces heat build-up caused by stresses in the tread shoulders

Remark

(1) Tolerances on wheel diameter • Code designated sizes (in): nominal rim diameter +0.005"/-0" • Metric sizes (mm): h11 according to ISO/R286. Surface roughness Ra < 6.3 μ m • Chamfer 5 mm wide @ 30°

It is possible that certain items are not sold in your region.

Please contact your local sales contact to check tire availability in your region.



